# HANSA Filter drier sight glass combination flare connection 7/16''UNF w indicator HM052 FI HMK 2837806050



HANSA 2837806050

## Product short description:

Filter drier sight glass combination flare connection 7/16''-20UNF w indicator HM052 FI
fits tube size 6 mm | 1/4''
60 bar
Dimension (LxWxH): 189x52x52 mm
Weight: 0,434 kg
Part-No.: 2837806050

NSN: 6680123422150

Made in Germany

## Product codes:

Reference: 2837806050
EAN13: 4251692915738

## Product description:

Multiplex sight glass combi with indicator

Filter drier for liquid refrigerants, optimum mixture of molecular sieve and activated aluminium oxide

Technical details of the filter drier:

- Temperature range: -40°C +120°C
- Max. operating pressure: 60 bar
- High water absorption capacity
- High acid absorption capacity
- Ultra-fine filtration up to 15 micron
- Steel housing
- Closed design
- 3-fold filtration through granulate block, filter fleece and brass mesh filter
- CE marking according to PED 97/23 EC not required
- R290 Propane suitable: yes
- R744 CO2 suitable: yes

Hansa Kältetechnik GmbH
Langenwiedenweg 111
D-59457 Werl / Deutschland
Telefon: +49 2922 86665-0
Fax: +49 2922 86665-284
E-Mail: info@hansakaelte.de

© 2024 HANSA Kältetechnik GmbH

Approved refrigerants: HFC / PFC / CFC / HC  / R744  / R290
except of NH3 containing refrigerants.


Sight glass housing material: brass  (acc DIN EN12164)

Typ SG: Indicates the lack of cooling agent in the refrigeration system. Large visible surface in all versions.

**Product features:**

Material design: Brass
Material design: Steel
Connection type: Flare
Connection: 7/16-20UNF
Pressure range: 60 bar
Fits: Ø 6mm
Fits: 1/4''

**Product attributes:**

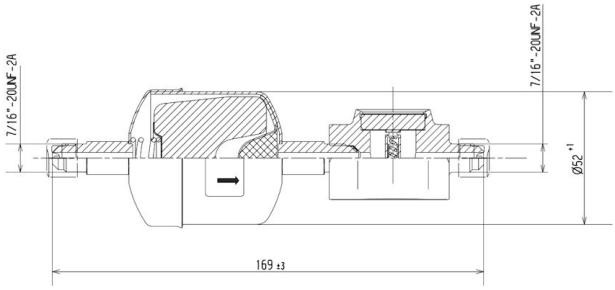


HANSA 2837806050



HANSA 2837806050

Hansa Kältetechnik GmbH
Langenwiedenweg 111
D-59457 Werl / Deutschland
Telefon: +49 2922 86665-0
Fax: +49 2922 86665-284
E-Mail: info@hansakaelte.de

© 2024 HANSA Kältetechnik GmbH