

HANSA Filter drier sight glass combination flare 7/16"UNFHMSG 052 HMK 2837906050

Product short description:

Filter drier sight glass combination HMSG 052 6 mm | 1/4"


60 bar

Dimension (LxWxH): 189x52x52 mm

Weight: 0,428 kg

Part-No.: 2837906050

Made in Germany

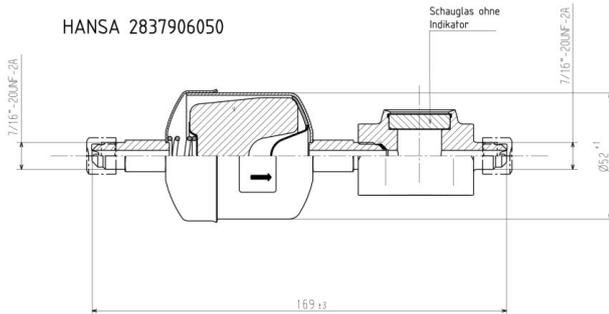

Product codes:

Reference: 2837906050

EAN13: 4251692915769

Product description:

Multiplex sight glass combi

Filter drier for liquid refrigerants, optimum mixture of molecular sieve and activated aluminium oxide

Technical details of the filter drier:

- Temperature range: -40°C +120°C
- Max. operating pressure: 60 bar
- High water absorption capacity
- High acid absorption capacity
- Ultra-fine filtration up to 15 micron
- Steel housing
- Closed design
- 3-fold filtration through granulate block, filter fleece and brass mesh filter
- CE marking according to PED 97/23 EC not required
- R290 Propane suitable: yes
- R744 CO2 suitable: yes

Approved refrigerants: HFC / PFC / CFC / HC / R744 / R290
except of NH3 containing refrigerants.

Sight glass housing material: brass (acc DIN EN12164)

Typ SG: Indicates the lack of cooling agent in the refrigeration system. Large visible surface in all versions.

Product features:

Material design: Brass

Material design: Steel

Connection type: Flare

Connection: 7/16-20UNF

Pressure range: 60 bar

Fits: Ø 6mm

Fits: 7/16"

Product attributes:

